

Technical Specifications:

Model: PRIME INLINE 1

Model Year: 2022

Axle to Axle: 31" +/- .125"

Brace Height: 7" +/- .0625"

Limb: 10" (p/n:1001879)

Limb Bolt Length: 1-3/4"

Cam: INLINE

Cam Timing: Four Dots Aligned/Even

Cable Guard: FLEXIS LITE 4.438"

String Stop: 7-1/8"

Cam System


MOD POS.	DRAW LENGTH**	ATA RATING*
1	30 1/2"	323-328
2	30"	319-324
3	29 1/2"	314-319
4	29"	309-314
5	28 1/2"	304-314
6	28"	299-304
7	27 1/2"	293-298
8	27"	287-293
9	26 1/2"	281-286
10	26"	275-280

*Estimated performance at 70-73lbs, 350 grains **Draw lengths are minus nothing, plus 1/4"

Limb Deflections

Nominal Defl.	Defl. Range	Draw Weight*
56	53-59	80-83 lbs
62	59-65	70-73 lbs
67	64-70	65-68 lbs
72	69-75	60-63 lbs
84	81-87	50-53 lbs
102	99-105	40-43 lbs


String/Cables

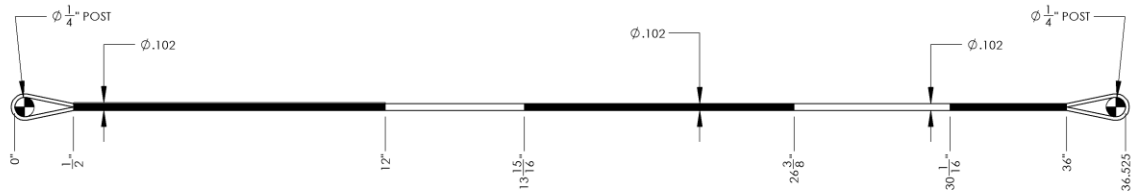

After Market String Warning


Warning: Never remove, move, or add additional string weights to your Prime bow's string or cables. String weights are specifically engineered for weight and location to ensure correct operation of your bow. Alterations to string and cable speed weights could cause your bow to break or malfunction and cause serious injury or death.

Warning: Never use aftermarket strings and/or cables on your bow. Aftermarket strings and/or cables may not be suitable for replacement on your Prime bow. Prime cannot guarantee that the materials or the manufacturing methods used by aftermarket string and/or cable manufacturers will be suitable for use on your Prime bow. Failure to heed this warning could result in serious injury or death to yourself or bystanders. Only Genuine Prime branded strings and/or cables should be used on your Prime bow.

	
TITLE: 2022 Prime Inline 31 Cable	
PartNo:	REV
1004600	B

Notes:

1.) String weights are to be covered by heat shrink tubing

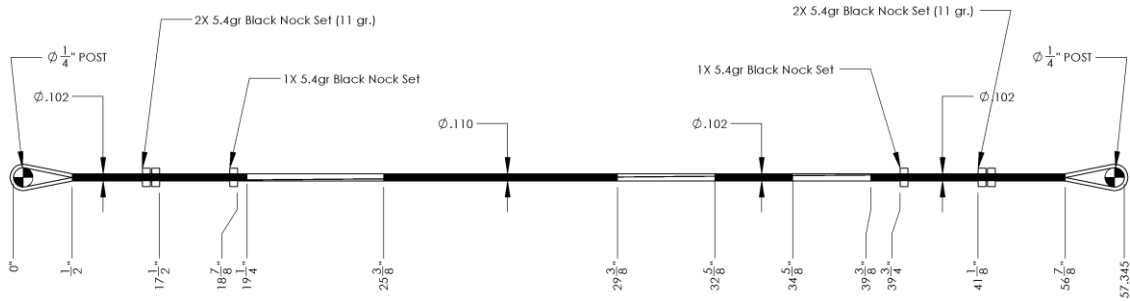

After Market String Warning

Warning: Never remove, move, or add additional string weights to your Prime bow's string or cables. String weights are specifically engineered for weight and location to ensure correct operation of your bow. Alterations to string and cable speed weights could cause your bow to break or malfunction and cause serious injury or death.

Warning: Never use aftermarket strings and/or cables on your bow. Aftermarket strings and/or cables may not be suitable for replacement on your Prime bow. Prime cannot guarantee that the materials or the manufacturing methods used by aftermarket string and/or cable manufacturers will be suitable for use on your Prime bow. Failure to heed this warning could result in serious injury or death to yourself or bystanders. Only Genuine Prime branded strings and/or cables should be used on your Prime bow.



TITLE: **2022 Prime Inline 31 String**

PartNo:	1004601	REV	D
---------	---------	-----	---